

PW861

Circular Chart Recorder




FEATURES

- 0-100 PSI, 24-Hour
- Splash proof case with IP66 rating
- Corrosion resistant case
- Single AA battery operation

ABOUT

Pressure recording with a full 8" (203mm) diameter chart. These easy-to-read pressure charts show 3x as much data as our 4" (101mm) and they are contained in a splash proof enclosure. Create a permanent visual record of your pressure data with the greatest detail.

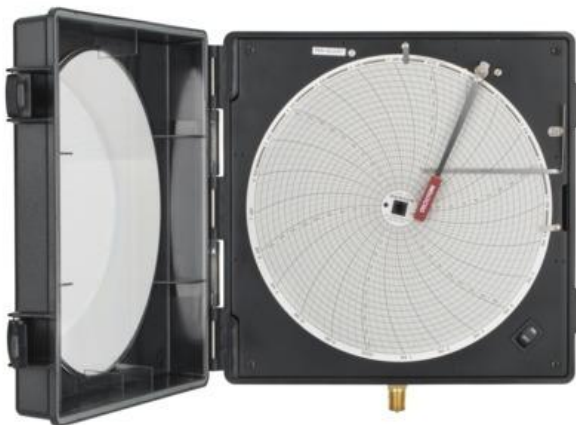

For more information, please refer to

T: +31 (0)174 287 160

E: info@vrsupplies.com

W: www.vrsupplies.com

Circular Chart Recorder

Specifications

- **Ambient Operating RH Conditions:** 0-95% RH non-condensing
- **Ambient Operating Temperature Conditions:** -22 to 122F (-30 to 50C)
- **Battery Life (Avg):** 1 Year
- **Calibration Options:** N100, N300
- **Channels CH1:** Pressure
- **Chart Rotation Speed:** 24 Hour
- **Dimensions:** 3.6 x 10.3 x 9.5in
- **Enclosure:** Plastic NEMA 4X Case with Window in Door
- **Fitting:** 1/4" NPT Thread, 5/8" Hex
- **IP Rating:** 66
- **Included Accessories:** One AA Battery, Red Pen and Quick Start Guide.
*Charts sold separately.
- **Mounting Options:** Stem or Wall Mount (With Keyhole)
- **Power Source:** Battery; One AA Battery (User Replaceable)
- **Pressure Accuracy:** 2% of Full Scale
- **Pressure Range:** 0 to 100PSI
- **Response Time:** 1 to 5 Seconds
- **Unit Weight:** 2.9 lbs
- **Units/Pkg:** 1
- **Warranty:** 12-Month Limited

Accessories



A791 – Pressure Kit
Pressure Fitting Accessory Kit



A792 – Pressure Pigtail
Steam Pressure Pigtail



A793 – Hydrant Kit
Fire Hydrant Adapter Kit



R006 – AA Battery



R022 – Pressure Filter Kit
Filtre Kit includes Snubber